

# Defender Series 2335 - 2 1/2" x 135°

### Features:


- Extruded Polycarbonate
- U/L 94 Flammability:
  - V-2 @ 0.125
  - V-2 @ 0.0625
  - V-0 @ 0.2500
- Stock lengths 4'-0" (1219) and 8'-0" (2438)
- Custom lengths available
- Mechanical fasteners

### Finishes:


- Clear smooth finish
- Manufacturer's standard colors (optional)

### Mounting Options:

- Double-faced tape
- Undrilled (fastening method by others)

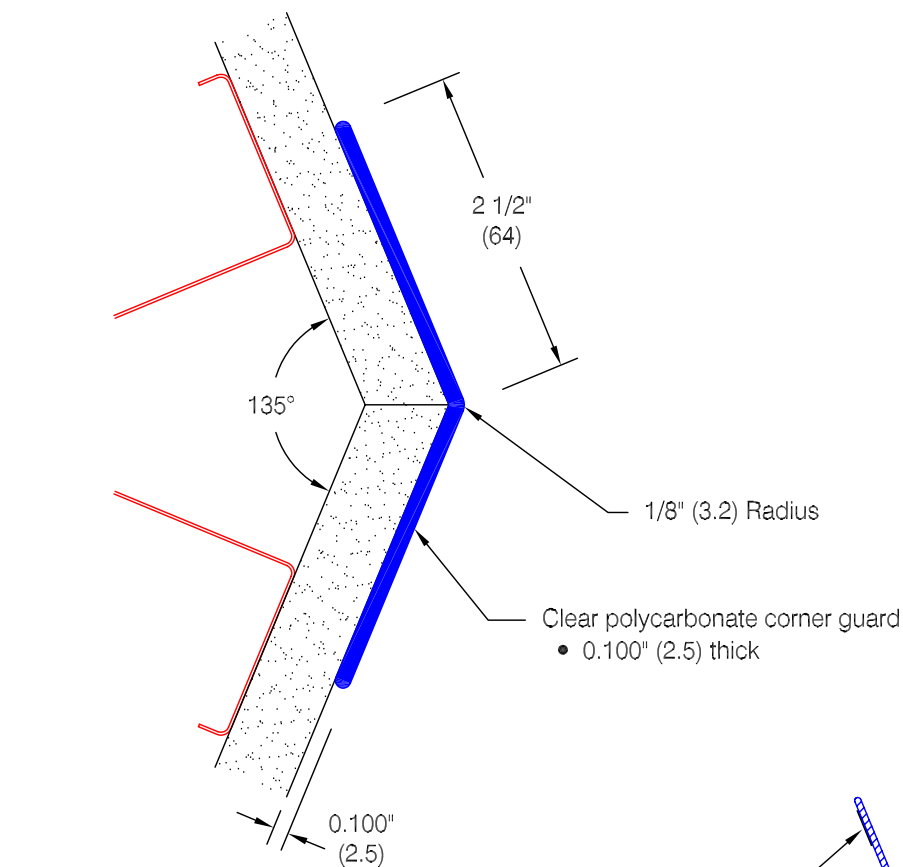


#6 x 1" (25) oval head chrome plated sheet metal screw

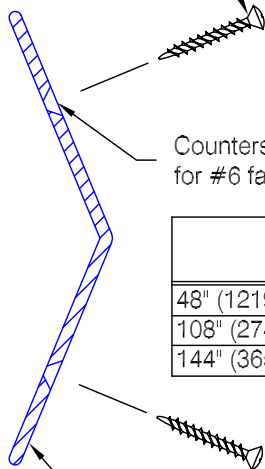

Countersunk hole for #6 fastener

Length	Total # of Screws
48" (1219) thru 107" (2718)	6
108" (2743) thru 143" (3632)	8
144" (3658)	10


2335 - 2 1/2"  
• Drilled and Countersunk



Optional Tape Mounted  
(Specify)



Optional Undrilled  
(Specify)

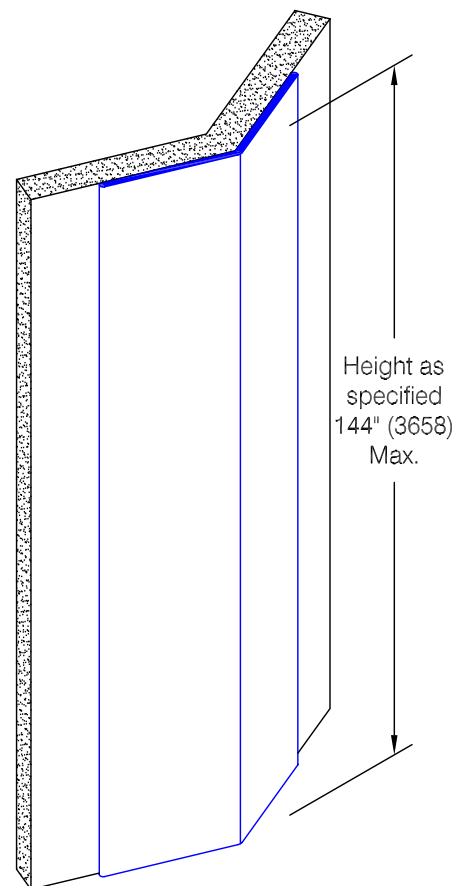

Standard Screw Mounted