


# Protector Series 2180.3

## Features:



- Prefabricated to field verified measurements
- Factory formed 3" radius wall returns and corners
- 12'-0" maximum length without butt-joints
- Corners factory formed to accommodate angles other than 90°
- Bracket standoff 3" standard as shown  
1 1/2" and 2" standoffs are available

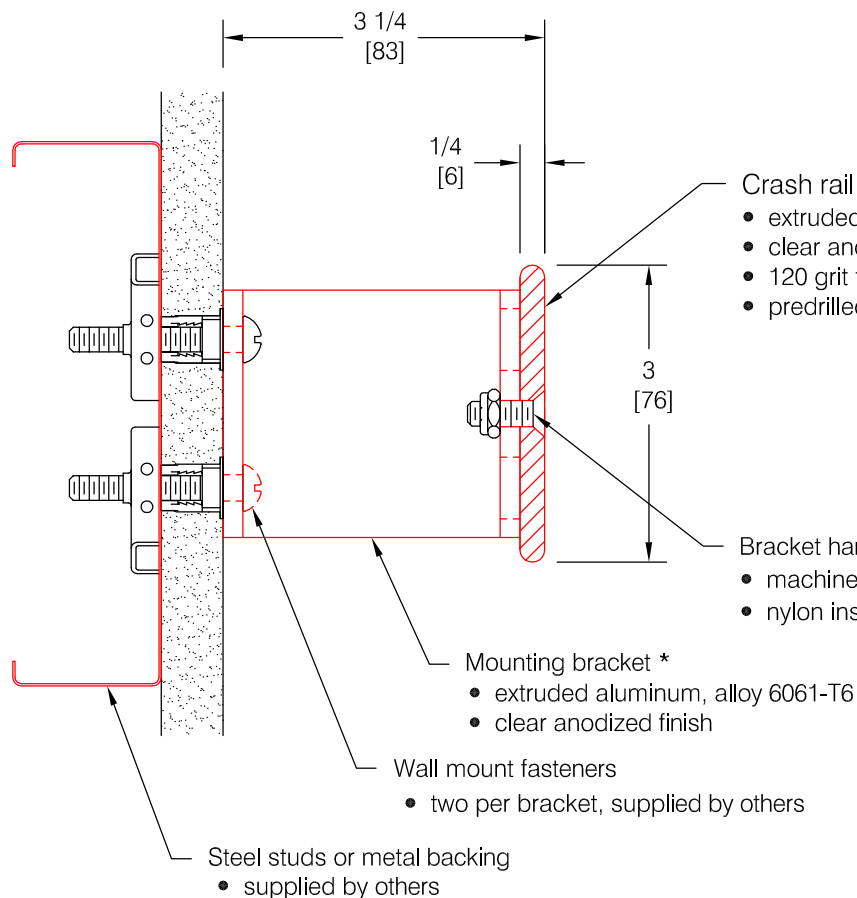

- Crash rail
  - extruded aluminum, alloy 6061-T6
  - clear anodized finish
  - 120 grit finish on outward surface
  - predrilled and countersunk for bracket hardware

\* Nominal bracket spacing 32" on center. Actual bracket spacing will vary according to jobsite conditions. Maximum spacing not to exceed 48" (1219).

- Bracket hardware
  - machine screw, 1/4-20 x 3/4", flat head, stainless steel
  - nylon insert lock nut, stainless steel

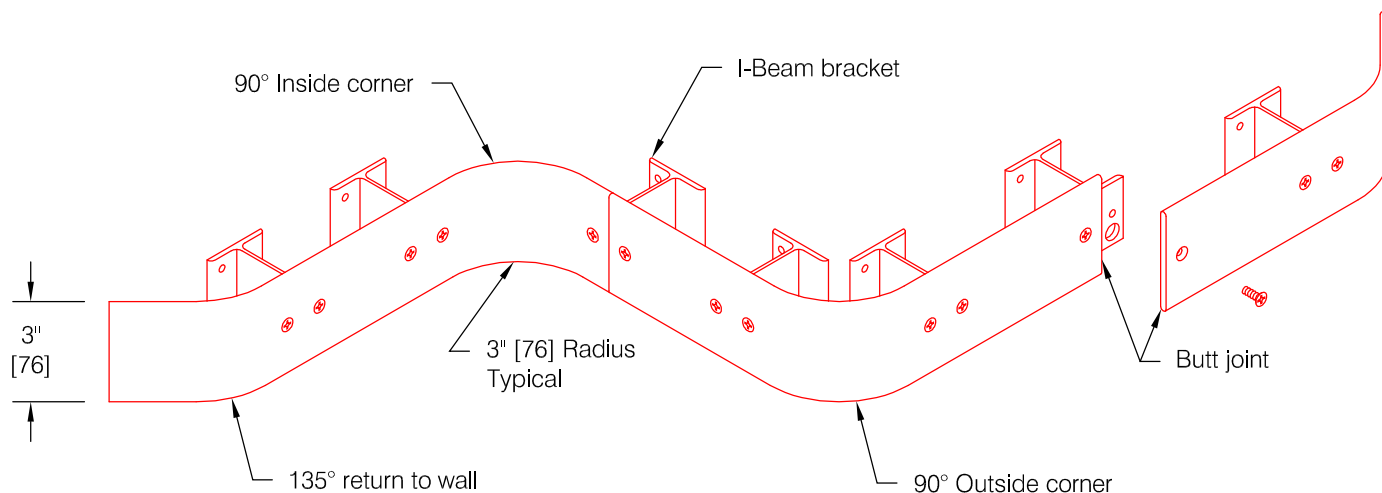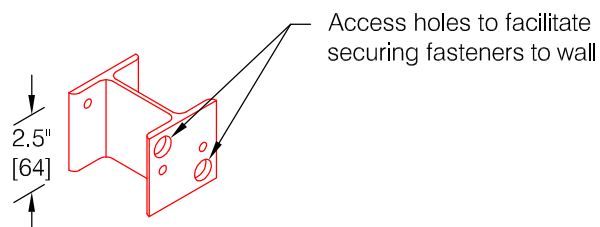

WallGuard.Com reserves the right to discontinue a design or modify an existing design without prior notice