


Protector Series 2181.6

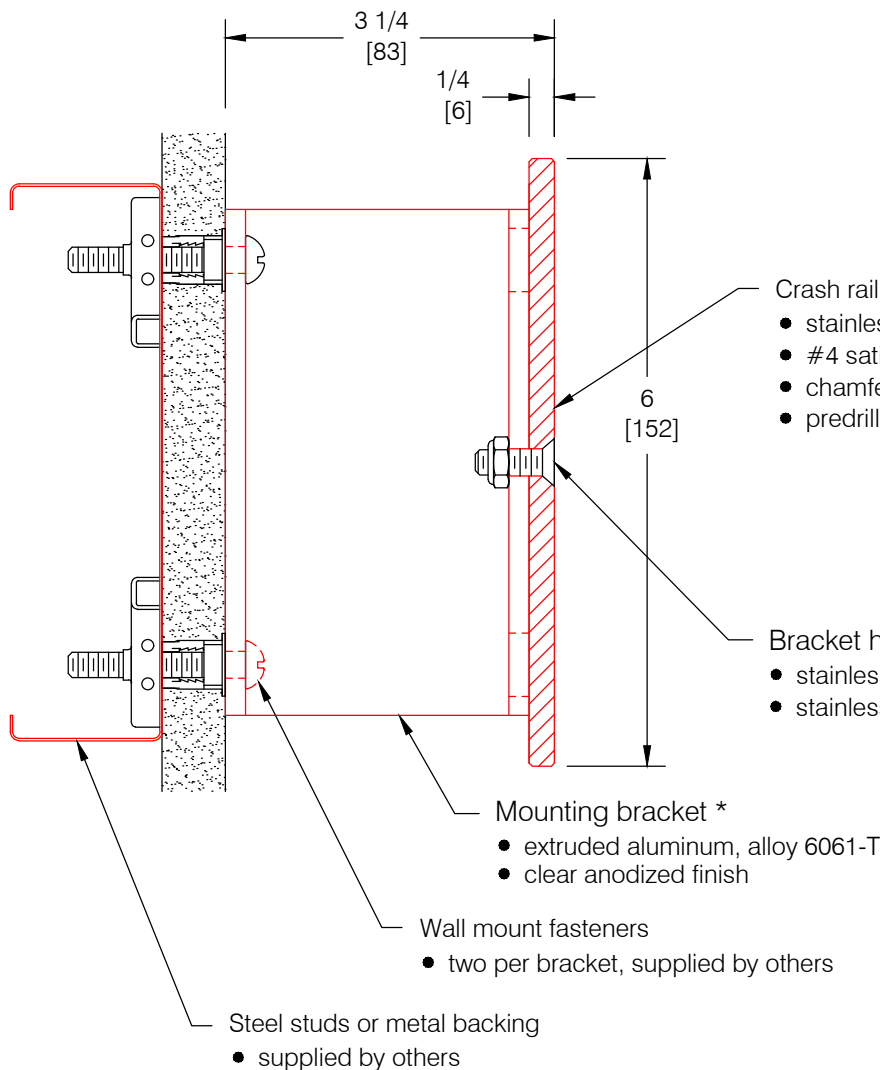



Features:

- Prefabricated to field verified measurements
- Factory formed 3" radius wall returns and corners
- 12'-0" maximum length without butt-joints
- Corners factory formed to accommodate angles other than 90°
- Bracket standoff 3" standard (as shown)
1 1/2" and 2" standoffs are available

- Crash rail**
- stainless steel, type 304
 - #4 satin finish
 - chamfered edges
 - predrilled and countersunk for bracket hardware

* Nominal bracket spacing 32" on center.
Actual bracket spacing will vary according to
jobsite conditions. Maximum spacing not to
exceed 48" (1219).

- Bracket hardware**
- stainless steel machine screw, 1/4-20 x 3/4", flat head
 - stainless steel nylon insert lock nut

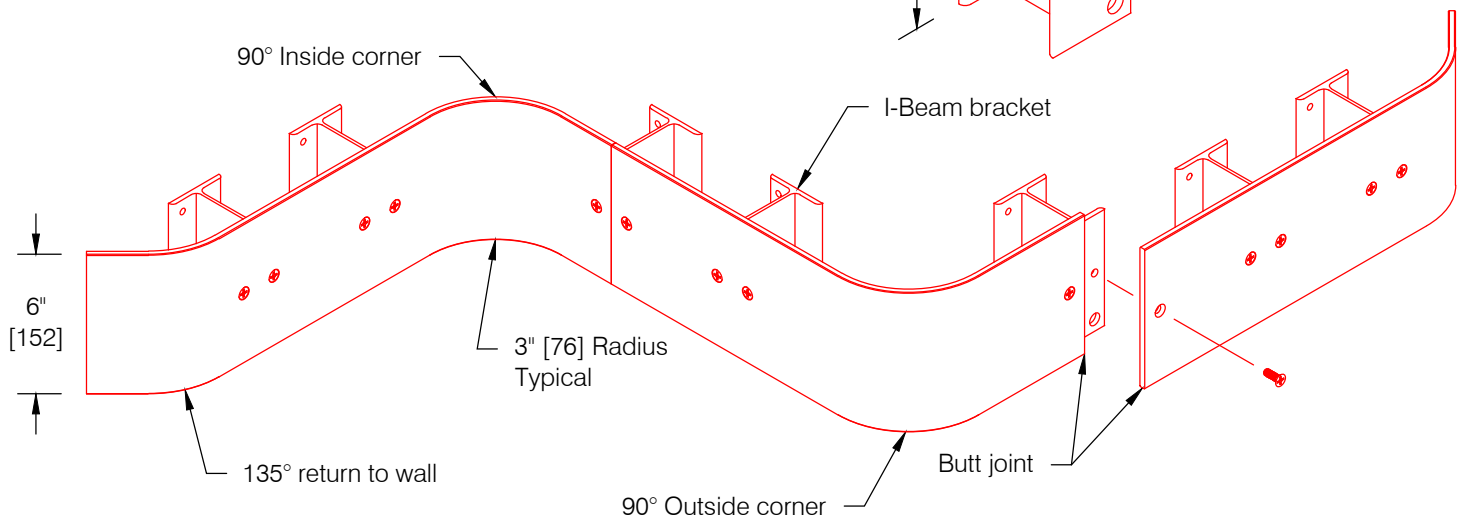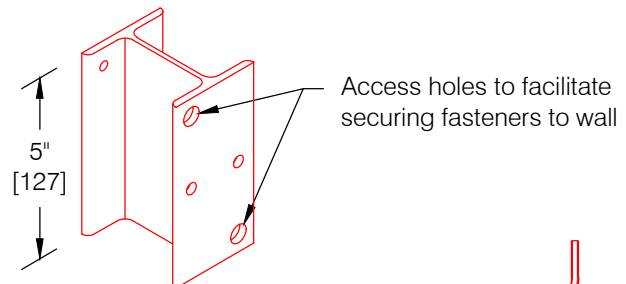

WallGuard.Com reserves the right to discontinue a design or modify an existing design without prior notice