

Protector Series 2235 - Single Bulb

Features:


- Extruded flexible vinyl to RMA tolerances
- Durometer: (ASTM D-2240) 80 ± 3 , Shore A
- Tensile strength: (ASTM D-412) 2,205 PSI
- Elongation: (ASTM D-412) 360%
- Specific gravity: (ASTM D-792) 137 ± 0.02
229 lbs. / in. min.
- Weight: 1.8 lbs. / lf.
- Stock length: 12'-0" (3658)

Optional Features:

- Urethane end cap black only

Standard Colors:

- Black
- Tan
- Brown
- Gray
- White
- Safety yellow

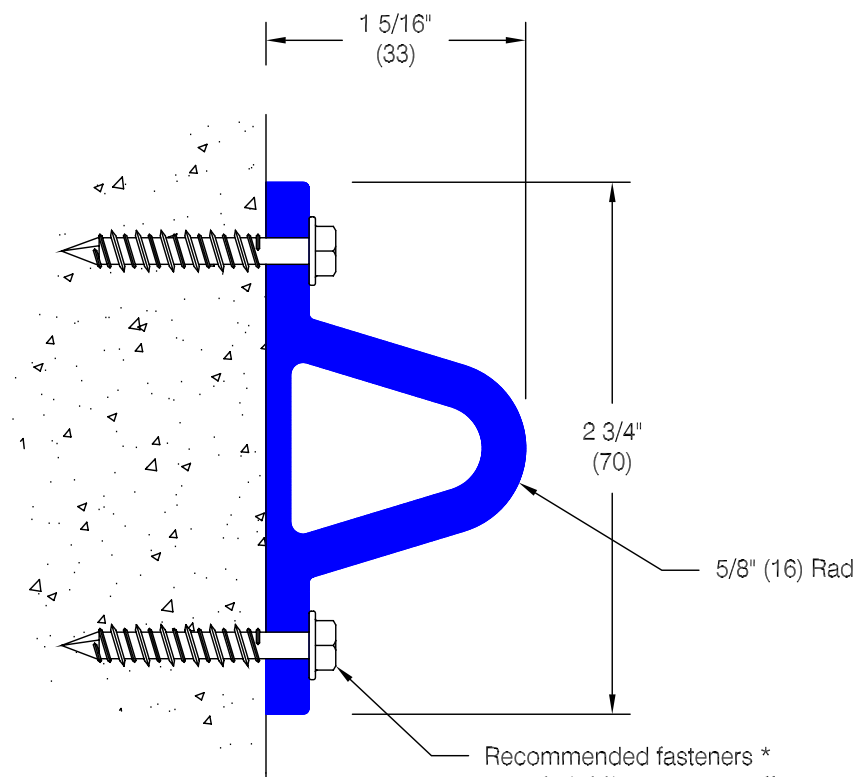

Recommended fasteners *

- 16" (406) on center - offset
- Supplied by others
- Suggested concrete hardware:
1/4" (6) x 1 3/4" (44) Rawl Tapper™
- Suggested wood hardware:
1/4" (6) x 1 3/4" (44) lag screw
- Stainless steel fasteners recommended
in marine environments

* Standard bumper is supplied undrilled and with no mounting hardware.

