


## Protector Series 2215

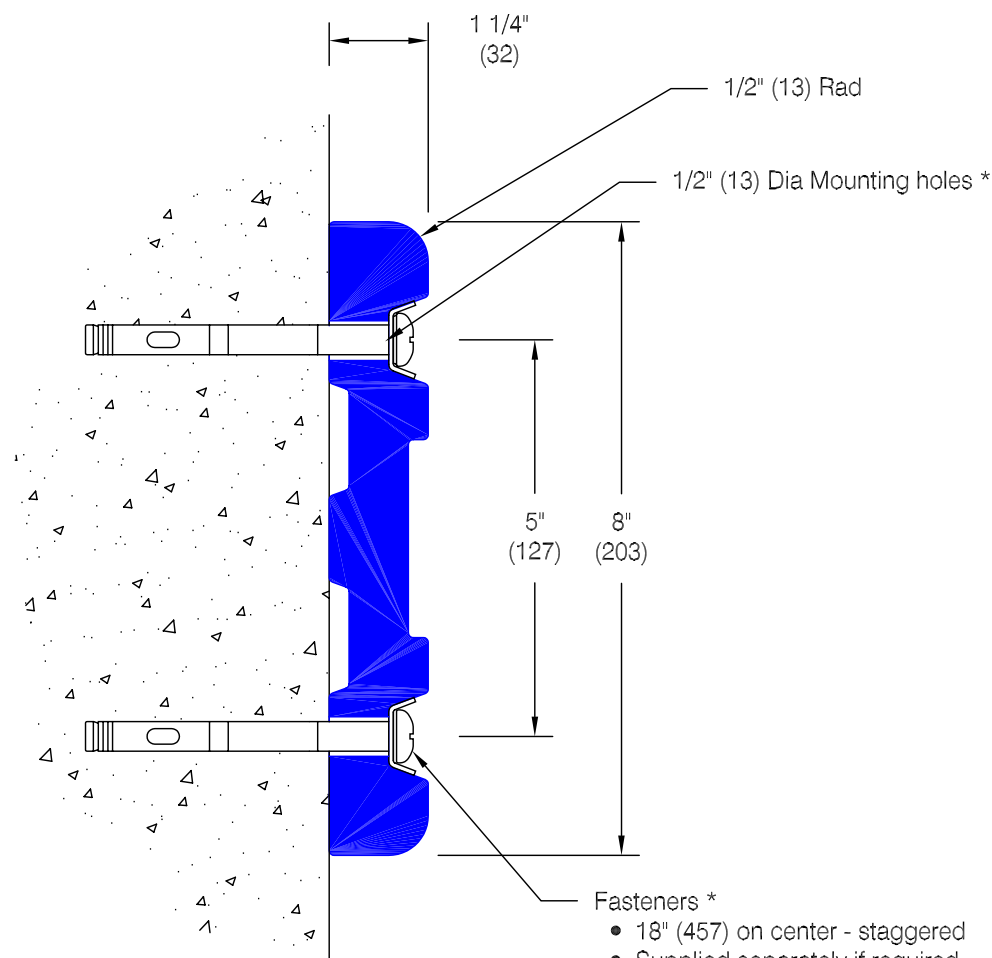

\* Standard bumper is supplied undrilled and with no mounting hardware. Hole spacing shown for bumpers 56" (1422) and longer. Contact factory for hole spacing on lengths shorter than 56" (1422).

- Fasteners \*
- 18" (457) on center - staggered
  - Supplied separately if required
  - Suggested concrete hardware:  
3/8" (10) x 3 3/4" (95) Lok bolt  
with U-washer

*Features:*


- Molded polyurethane
- Durometer: (ASTM D-412) 70  $\pm$  5 shore A
- Tensile strength PSI: (ASTM D-412) 592 min.
- Elongation: (ASTM D-412) 61% min.
- Tear strength: (ASTM D-624) 166 lbs./in. min.
- Stock length: 10'-0" (3048)

*Optional Features:*

- Drilled for hardware:  
Approximately 1" (25)-10" (254)  
in from each end, staggered  
18" (457) on center both grooves  
(Varies as restricted by length)
- Custom drilling available

Standard Color:

- Charcoal

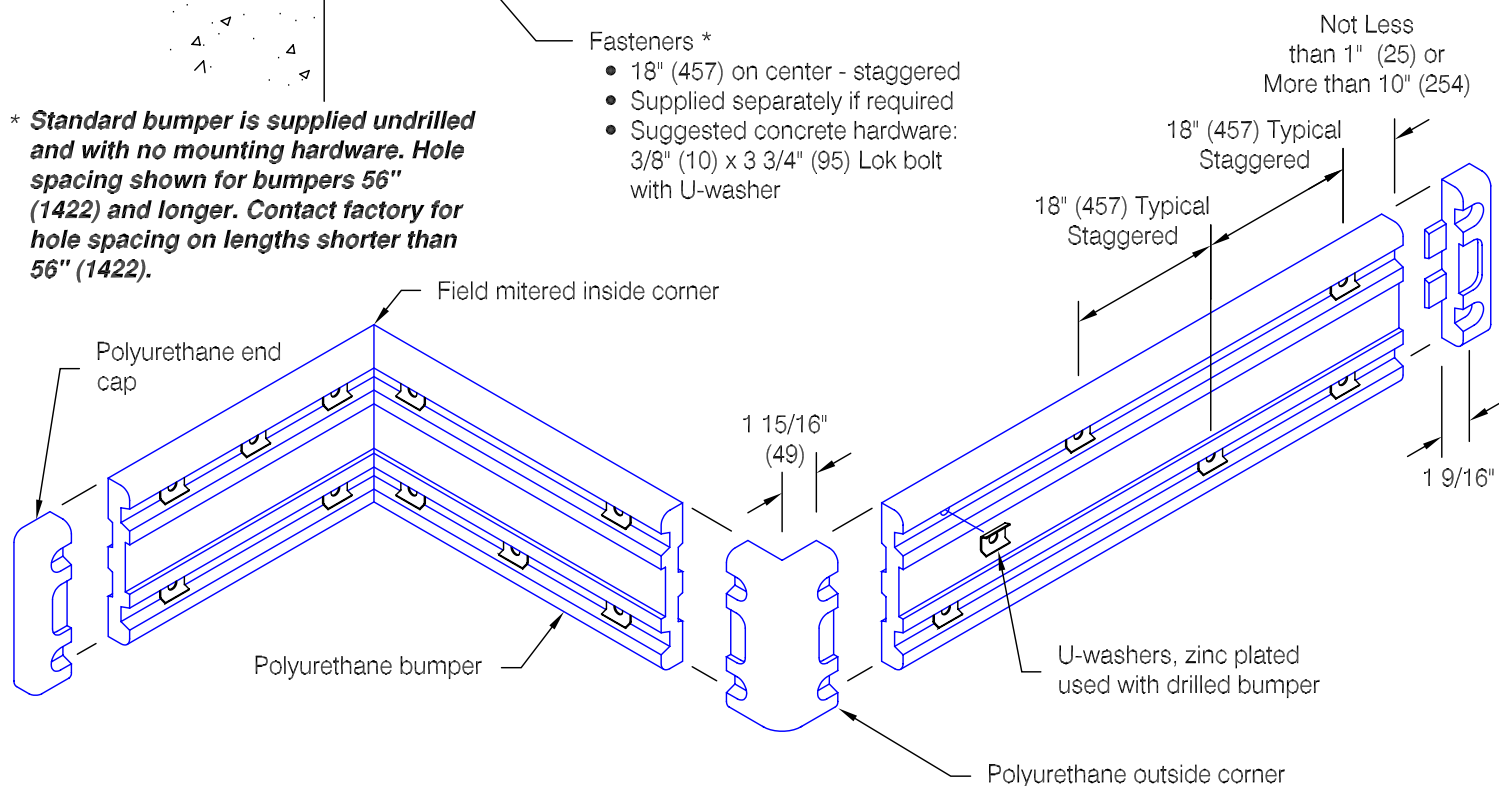

WallGuard.Com reserves the right to discontinue a design or modify an existing design without prior notice