
# Defender Series 2325 - 3"

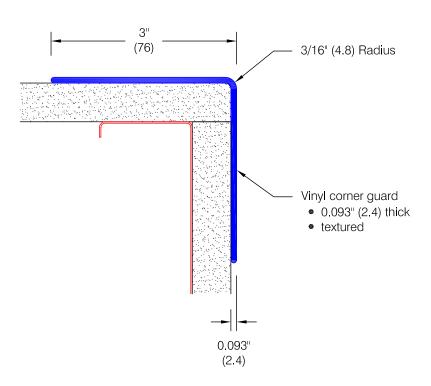


## Alternative Mounting

#### 2325.2B

- standard offering
- undrilled, untaped

#### 2325.2C

- factory applied adhesive tape
- on inward face of each leg



#### 2325.2D

- countersunk for #6 fastener
- 1" (25) from each end, spaced evenly not to exceed 36" (914)

#### Features:


- Class A fire rating
- Stock lengths: 4'-0" (1219), 8'-0" (2438) & 12'-0" (3658)

#### Finishes:

- Manufacturer's standard colors
- Custom colors available

### Available Mounting Options:

- Adhesive construction adhesive supplied separately
- Mechanical Fasteners countersunk for #6 x 1 1/2" (38) oval head screws, supplied separately
- Adhesive Tape double sided adhesive tape factory applied to corner guard
- See alternative mounting details at left

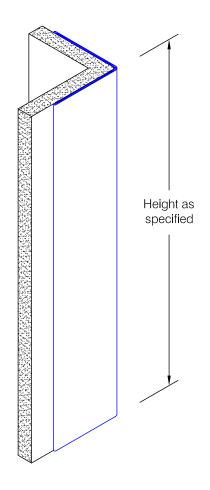

WallGuard.Com reserves the right to discontinue a design or modify an existing design without prior notice

Toll Free Tel: 1-877-WGDOTCOM 1-877-943-6826 Toll Free Fax: 1-877-WGFAXCOM 1-877-943-2926 web: www.wallguard.com email: sales@wallguard.com