

Defender Series 2341.4 - 2" x 135°

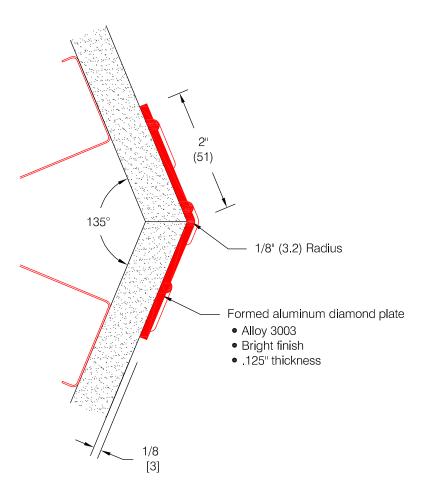



Optional Drilling:

• Standard spacing: 3" (76) from each end and spaced evenly not to exceed 36" (914) oc

Features:

- Alloy 3003 Aluminum diamond plate
- Custom lengths, angles, and wing sizes are available
- Available for 90° corners (see WGDC.2341.1)
- Stock lengths: 4'-0" (1219) & 8'-0" (2438)


Finishes:

Bright Finish

Mounting Options:

- Standard mounting Adhesive:
 - Adhesive supplied separately
- Optional mounting Drilled:

Countersink holes for #8 fastener ABSS-113 #8 x 1 1/2" (38) oval head sheet metal screw or equivalent

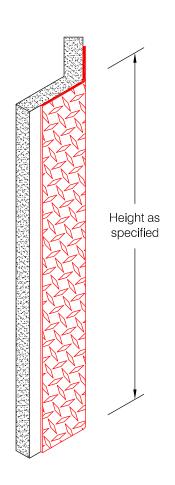

WallGuard.Com reserves the right to discontinue a design or modify an existing design without prior notice

Toll Free Tel: 1-877-WGDOTCOM 1-877-943-6826 Toll Free Fax: 1-877-WGFAXCOM 1-877-943-2926 web: www.wallguard.com email: sales@wallguard.com