



Defender Series 2340.4 - 2" x 135°

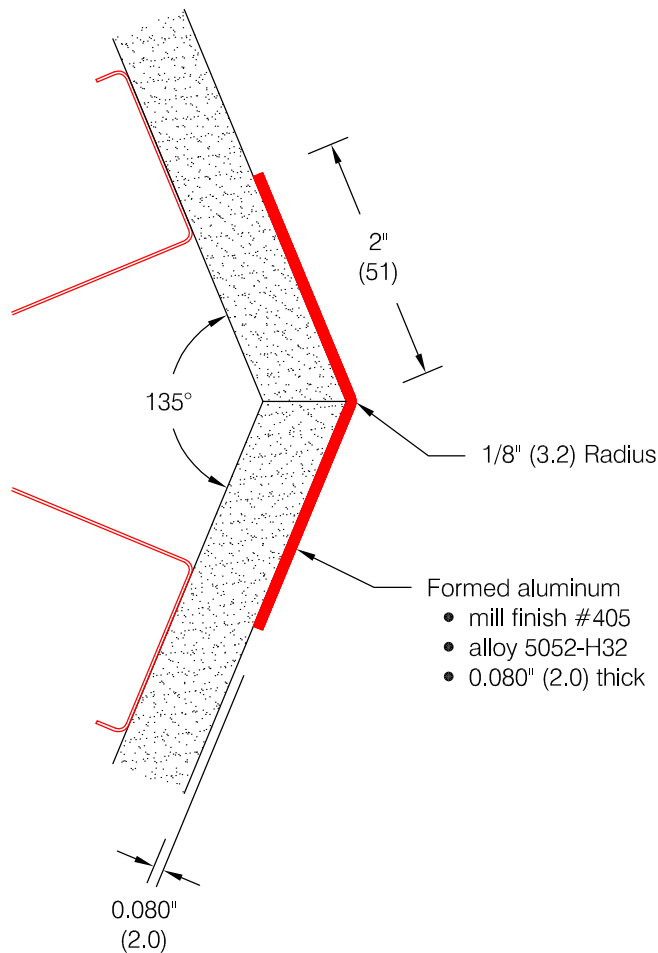

- Formed aluminum
- mill finish #405
 - alloy 5052-H32
 - 0.080" (2.0) thick

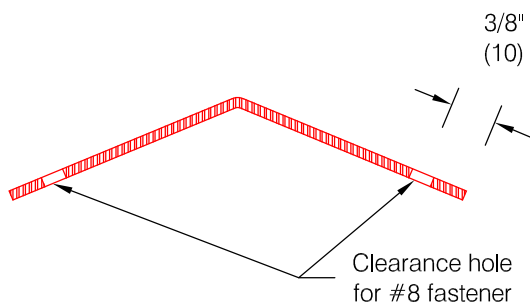

Optional Drilling:

- Standard spacing: 3" (76) from each end and spaced evenly not to exceed 36" (914) oc

Features:

- Custom lengths, angles, and wing sizes are available
- Available for 90° corners (see WGDC.2340.1)
- Stock lengths: 4'-0" (1219) & 8'-0" (2438)

Mounting Options:

- Standard mounting Adhesive: Adhesive supplied separately
- Optional mounting Drilled: Clearance holes for #8 fastener #8 x 1 1/2" (38) oval head sheet metal screw and stainless cup washer supplied separately as required

